



(19)

(11) Publication number: **08169779 A**

Generated Document.

PATENT ABSTRACTS OF JAPAN(21) Application number: **06332338**(51) Intl. Cl.: **C04B 38/00 C04B 28/02 E21D 11/00**(22) Application date: **14.12.94**

(30) Priority:

(43) Date of application
publication: **02.07.96**(84) Designated contracting
states:(71) Applicant: **CHICHIBU ONODA CEMENT
CORP**(72) Inventor: **SHIRASAKA MASARU
MORISHITA NOBUAKI
NOGUCHI MASAACKI**

(74) Representative:

**(54) FOAMED MORTAR
CAVITY FILLER**

(57) Abstract:

PURPOSE: To obtain an foamed mortar cavity filler not deteriorating foamability even in the case of use of an ordinary foaming agent, preventing the separation of materials without using a thickener and having satisfactory characteristics while using fly ash in combination with cement as a hardening material.

CONSTITUTION: Water is added to a mixed hardening material obtd. by mixing fly ash with cement in a weight ratio of 4:6 to 2:8 to prepare a slurry contg. 50-70wt.% water. This slurry is mixed and blended with a proper amt. of a foaming agent.

COPYRIGHT: (C)1996,JPO**BEST AVAILABLE COPY**

THOMSON
DELPHION

RESEARCH

PRODUCTS

INSIDE DELPHION

Log In | My Account | Profile

Search: Quick Number Boolean Advanced Derwent

The Delphion Integrated View

Get Now: ☒ PDF | [More choices...](#)Tools: Add to Work File: ☒ Create new Work File ☒ GoView: INPADOC | Jump to: ☒ Top ☒ Go to: Derwent☒ Email this to a friendTitle: **JP8169779A2: FOAMED MORTAR CAVITY FILLER**Derwent Title: Foamed mortar cavity filler - prepd. from slurry of fly ash and cement, and mixed with blowing agent [\[Derwent Record\]](#)Country: JP Japan
Kind: AInventor: SHIRASAKA MASARU;
MORISHITA NOBUAKI;
NOGUCHI MASAOKI;Assignee: CHICHIBU ONODA CEMENT CORP
[News, Profiles, Stocks and More about this company](#)

Published / Filed: 1996-07-02 / 1994-12-14

Application Number: JP1994000332338

IPC Code: C04B 38/00; C04B 28/02; E21D 11/00; C04B 28/02; C04B 103/42;
C04B 111/40; C04B 111/70;

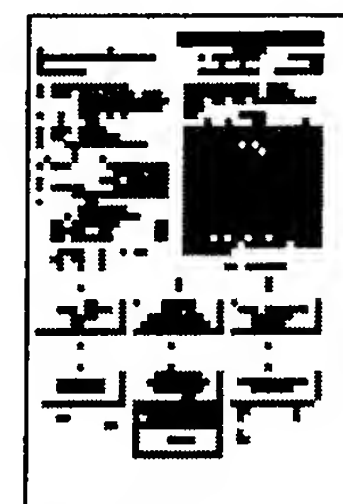
Priority Number: 1994-12-14 JP1994000332338

Abstract: PURPOSE: To obtain an foamed mortar cavity filler not deteriorating foamability even in the case of use of an ordinary foaming agent, preventing the separation of materials without using a thickener and having satisfactory characteristics while using fly ash in combination with cement as a hardening material.

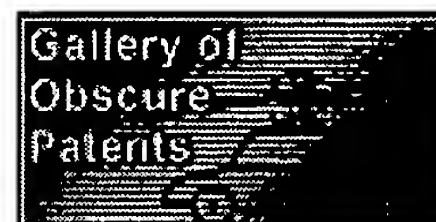
CONSTITUTION: Water is added to a mixed hardening material obtd. by mixing fly ash with cement in a weight ratio of 4:6 to 2:8 to prepare a slurry contg. 50-70wt.% water. This slurry is mixed and blended with a proper amt. of a foaming agent.

COPYRIGHT: (C)1996,JPO

Family: None

Other Abstract Info: CHEMABS 125(16)203134U CAN125(16)203134U DERABS C96-358434
DERC96-358434View
Image

1 page

[Nominate](#)[this for the Gallery...](#)